



TAYLOR® COMPANY

a Specialty Equipment company

Item No. _____

162

Soft Serve Freezer

Twin Twist, Taylormate®

162

Features

Offer all the popular soft serve variations from low or non-fat ice creams to custard, yogurt and sorbet. Serve two separate soft serve flavors, or an equal combination of both in a twist.

Freezing Cylinder

Two, 1.5 quart (1.4 liter).

Mix Hopper

Two, 8 quart (7.6 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) in Auto and Standby modes.

Indicator Lights

The Mix Low light alerts the operator to add mix.

Solid State Control

Precisely monitors viscosity to maintain consistent product quality.

Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.



Standard 6



SA2650



Selected 50
Hz. Models

Taylor Company has actively pursued all issues relating to the Year 2000 to assure compliance. This includes all internal business systems, the entire equipment line manufactured by Taylor, and readiness of our suppliers.



Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
e-mail: info@taylor-company.com

International Office
Taylor Company S.r.l.
Roma, Italy
Tel: +39-06-420-12002 Fax: +39-06-420-12034
e-mail: romeoff@taylor-company.com



Taylor Company

162 Soft Serve Freezer

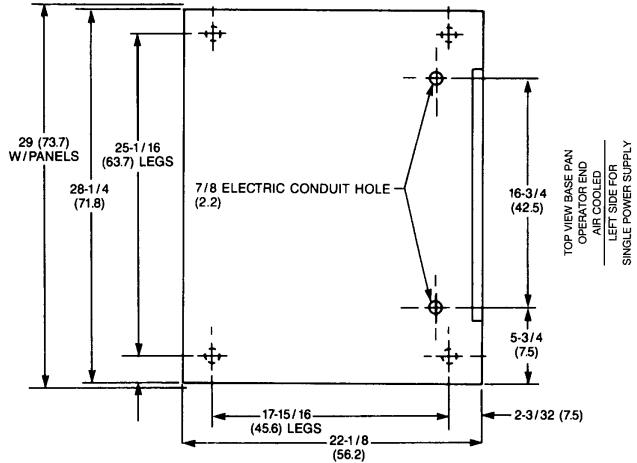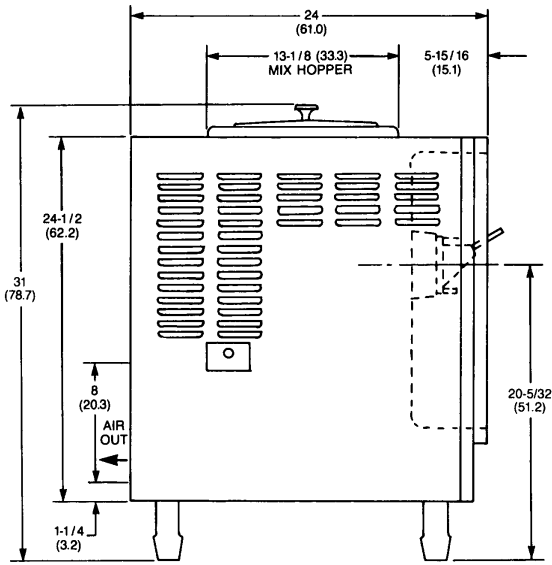

Weights	lbs.	kgs.
Net	410	186.0
Crated	460	209.0
	cu. ft.	cu. m.
Volume	23.2	.65

Dimensions	in.	mm.
Width	29	737
Depth	24	610
Height	31	787
Floor Clearance	4-1/4	108

*Mounted on standard legs

Electrical Connections	Maximum Fuse Size		Minimum Circuit Ampacity		Poles (P) Wires (W)
	Left	Right	Left	Right	
115/60/1 Air	25	20	20	17	2P 3W
One Dedicated Connection	Maximum Fuse Size		Minimum Circuit Ampacity		Poles (P) Wires (W)
	Left	Right	Left	Right	
208-230/60/1 Air	20		20		2P 3W
220-240/50/1 Air	20		18		2P 3W

This unit is manufactured in other electrical characteristics. Refer to the Distributor Data Book for availability. (For exact electrical information, always refer to the data label of the unit.)

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No | Cooling: Air Water NA

Options: _____

Specifications

Electrical

One dedicated electrical connection is required, except 115 volt requires two dedicated connections. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

Beater Motor

Two, 0.5 HP

Refrigeration System

Two, 3,000 BTU/hr. R404A.
 Separate Hopper Refrigeration (SHR), One, 400 BTU/hr. R134a.
 (BTUs may vary depending on compressor used.)

Air Cooled

Minimum 6" (15.2 cm) on all sides. Install the skirt provided on the rear of the unit to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Options

- Cone Dispenser
- Faucet
- Panel Spinner
- Self Service Package (includes hopper locks, mix low chime, self service decal & flavor pads, and sneeze guard)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.